



40" Freestanding Electric Range

PRODUCT MODEL NUMBERS


RF4700XE

Electrical: Use solid copper wire. A four-wire or three-wire, single-phase, 120/240-volt, 60-Hz, AC-only, electrical supply is required on a 40-ampere circuit, (or, if specified on the model/serial rating plate, a four-wire or three-wire, single-phase 120/208-volt, 60 Hz, AC-only electrical supply is available, a 40-ampere circuit), fused on both sides of the line. A time-delay fuse or circuit breaker is recommended. The model/serial rating plate is located on the oven frame behind the drawer.

When a four-wire receptacle of NEMA Type 14-50R is used, a matching U.L.-listed, four-wire, 250-volt, 40-ampere, range power supply cord (pigtail) must be used.

Local codes may permit the use of a three-wire receptacle of NEMA Type 10-50R, a U.L.-listed, 250-volt, 40-ampere range power supply cord (pigtail).

OVERALL DIMENSIONS

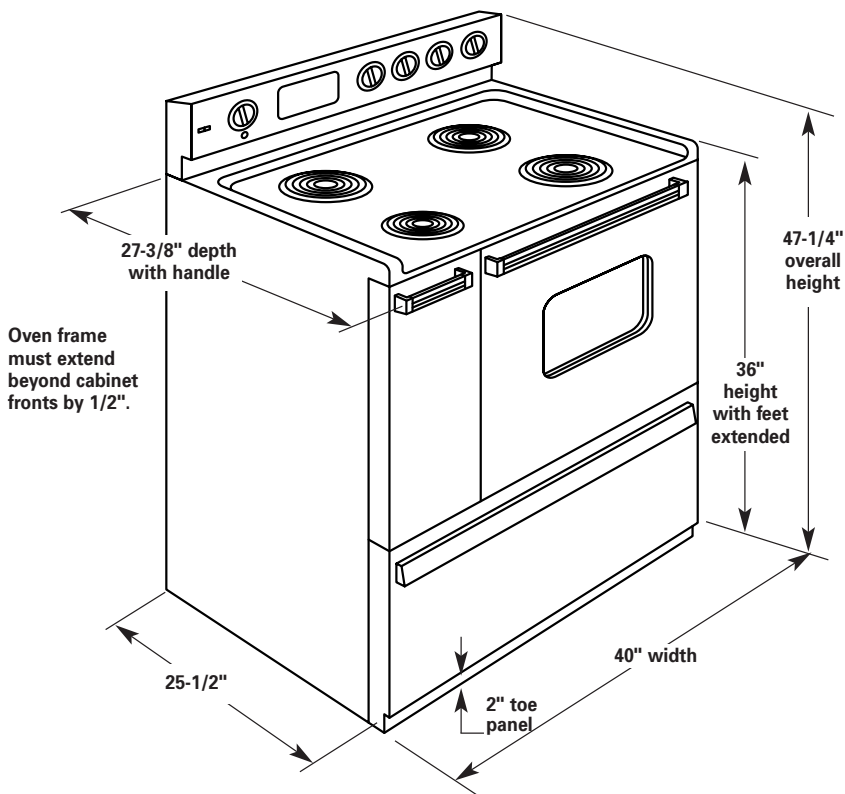

CABINET OPENING DIMENSIONS

