




GE Appliances

AVE18DB - GE 230 Volt Heat/Cool Series Room Air Conditioner with Mechanical Controls


Wall Case Dimensions (in inches)

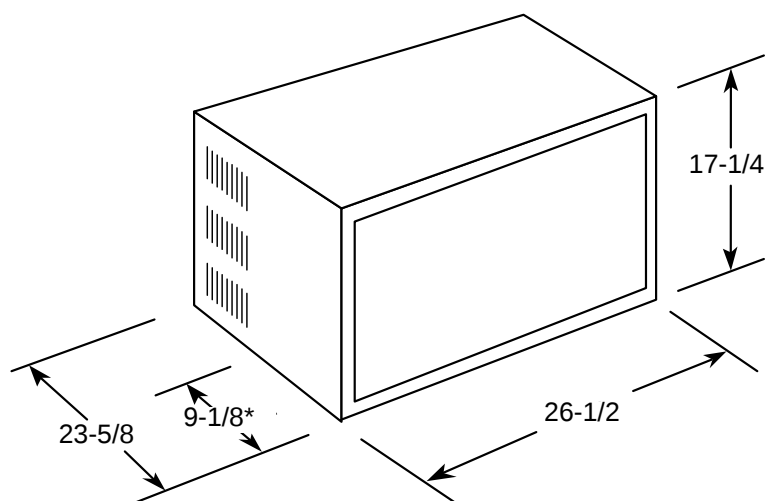

* Distance from front of case to side louvers (excluding grille).

Note: When installing Slide-Out chassis units in through-the-wall applications, keep louvers free. Do not restrict air flow areas.

Perpendicular



230/208V
20 Amp

Wall Outlets: All wiring including, installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

Note: Aluminum building wiring may pose special problems—consult a qualified electrician.

Specification Created 5/01

For answers to your Monogram®, GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.



Total capacity and E.E.R. ratings are calculated based on the Association of Home Appliance Manufacturers' standards.




Listed by
Underwriters
Laboratories



GE Appliances

AVE18DB - GE 230 Volt Heat/Cool Series Room Air Conditioner with Mechanical Controls

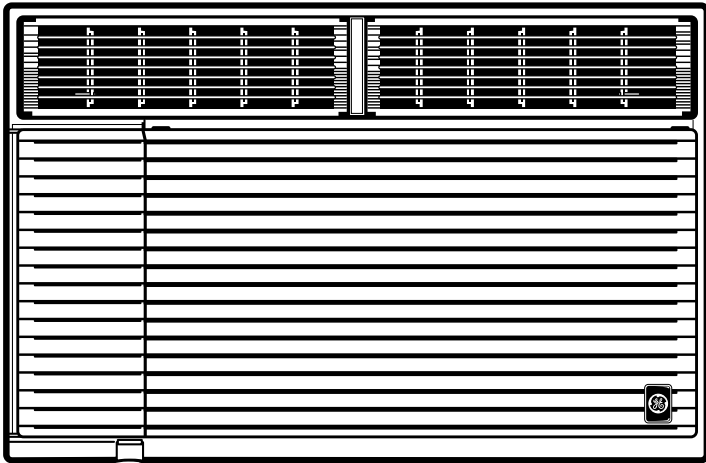

Features and Benefits

- 18,000/17,500 BTUH (Cooling), 10,200/8,700 BTUH (Electric Heat)
- 9.7/9.7 E.E.R.
- Mechanical Controls with 10-Position Thermostat
- 2 Cooling / 2 Heating Fan Speeds (1 Fan Position)
- 4-Way Variable Air Discharge
- Slide-Out Chassis
- 1,855/1,805 Cooling Watts / 7.9/8.5 Cooling Amps / 15.0/13.6 Heating Watts
- 5.5 Dehumidification (pints/hr)
- 450 CFM
- Hidden Controls Provide Clean, Contemporary Appearance
- Easy Cleaning Rigid, Slide-Out Filter
- Exhaust for Air Exchange
- Plug Type - Perpendicular
- Rigid Panel Window Mounting
- Rotary Compressor
- Model AVE18DB