


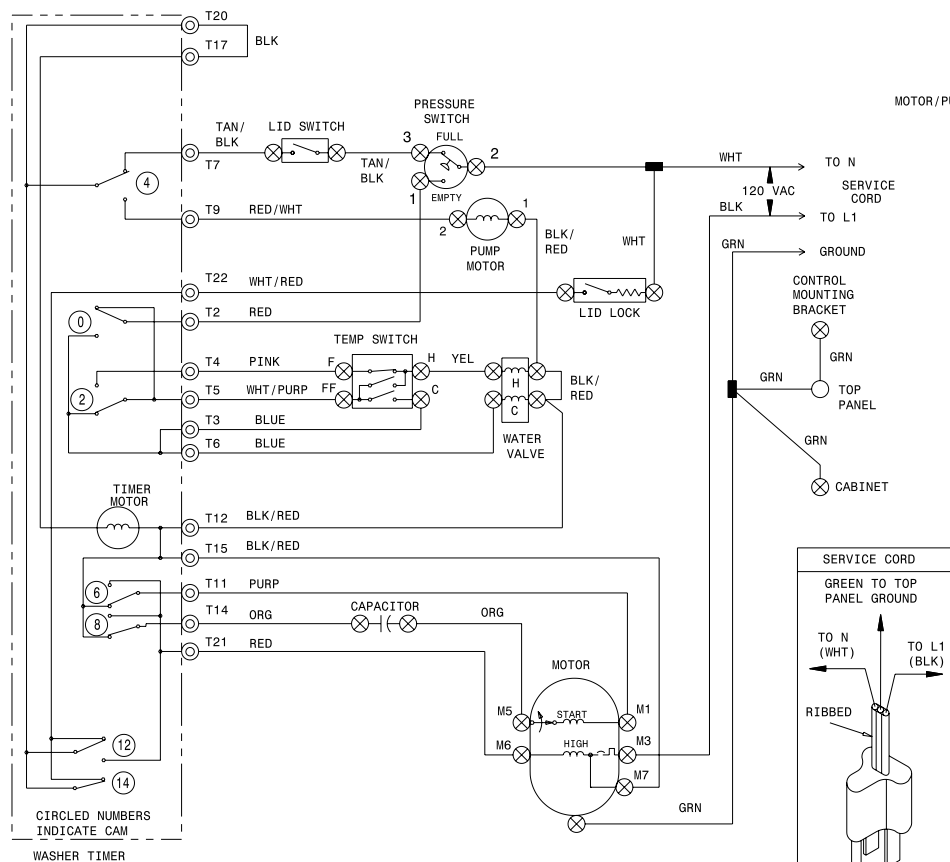


CAUTION: DISCONNECT ELECTRIC CURRENT BEFORE SERVICING

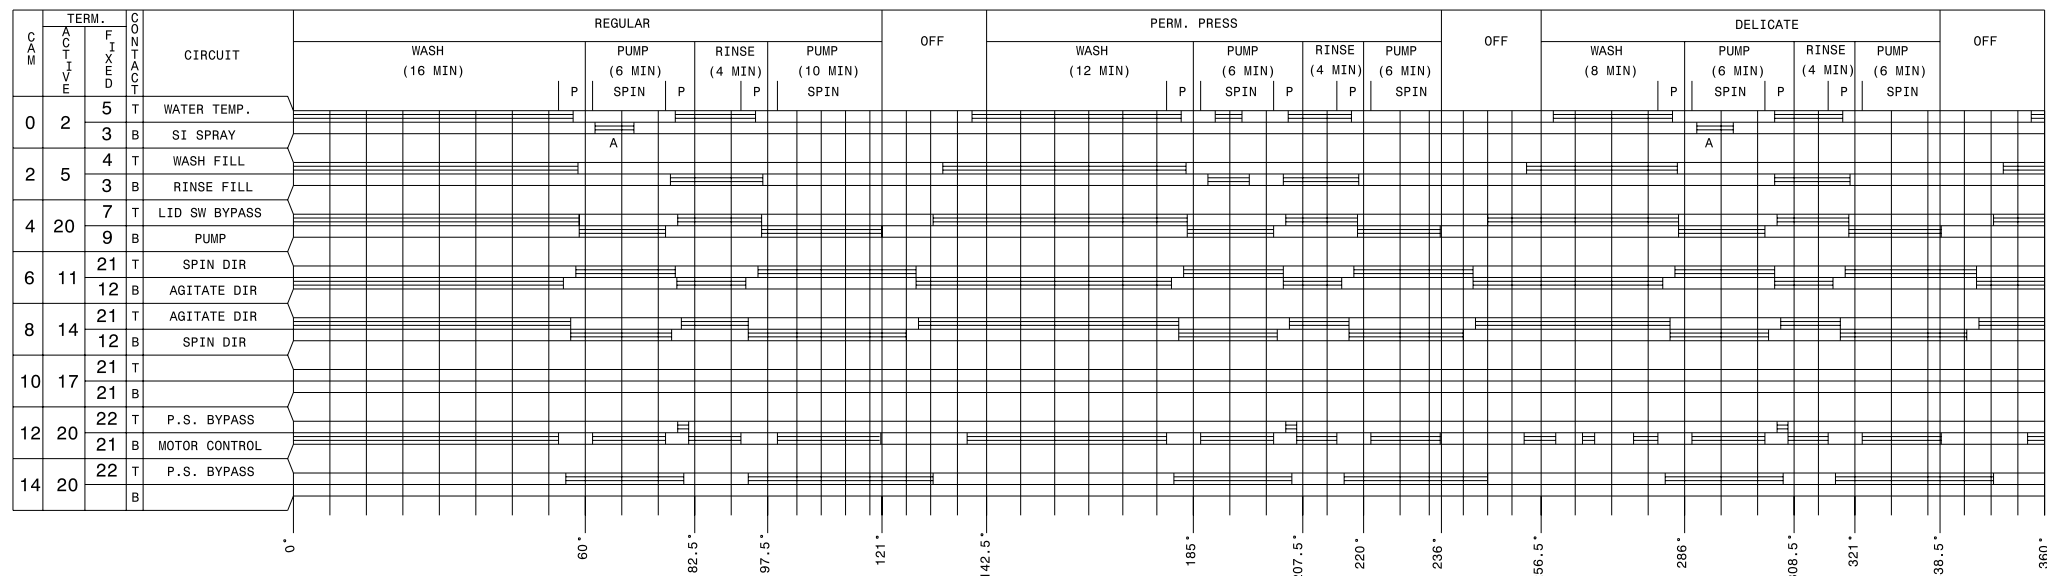

WIRING CODES	
⊙	PLUG IN TIMER TERMINAL
⊗	QUICK DISCONNECT TERMINAL
○	SCREW TERMINAL
+	NO CONNECTION
⋈	MOTOR SWITCH
—	SPLICE
⌋	MOTOR PROTECTOR
⌋	CHASSIS (CABINET) GROUND

TEMPERATURE SWITCH CIRCUIT			
WASH/RINSE	F-H	FF-H	FF-C
HOT/COLD	X	0	0
WARM/COLD	X	0	X
COLD/COLD	0	0	X
WARM/WARM(OPT)	0	X	X

0=OPEN X=CLOSED
(OPT)=OPTIONAL ON SOME MODELS

